

FD1700S



Dedicated Chip



Modular




Back Battery Unit



Layer3 Switching

Brief Views

The GPON OLT FD1700S fully complies with the relevant standards of ITU G.984.x and FSAN. It's a 1RU device featuring an uplink SFP port with options for either 4*1G/10G and 4*10G/25G. The PON ports come in configurations of 4/8/16 ports. Each GPON port supports a splitting ratio of 1:128. Consequently, the GPON system can accommodate up to 4096 terminal connections, depending on the number of PON ports chosen.

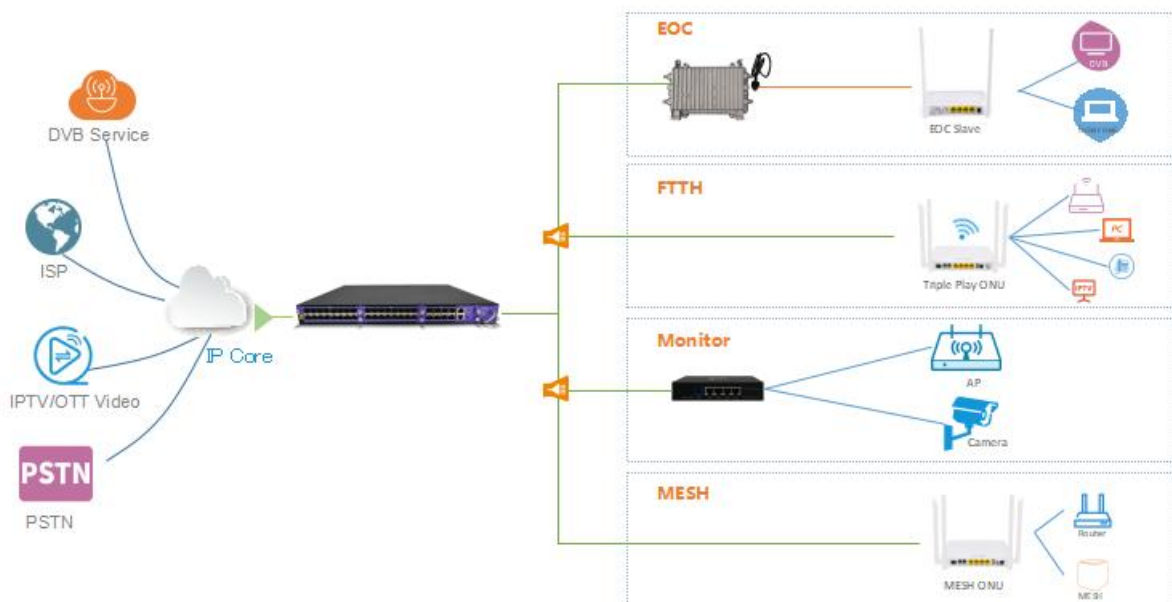

Functional Feature

GPON Function

- ITU-T G.984/G.988 standard
- Support OMCI protocol
- T-CONT DBA
- GEMPORT traffic
- ONU auto discover
- Ranging function
- Downstream data encrypted

Layer 2 Switching Function

- Access/Trunk/Hybrid L2 access mode
- Support 64K MAC address
- Support 4094 VLANs
- VLAN filter function,VLAN transform
- Smart QinQ
- L2 port mirror
- Support 1024 static MAC address
- MAC address learning/aging
- MAC address limitation
- Static/Dynamic LACP
- ACL
- RSTP

Layer 3 Switching Function

- Static routing
- DHCP server/DHCP relay/DHCP snooping
- ARP proxy

Multicast Function

- IGMP snooping
- IGMP V1/V2/V3
- Multicast VLAN translation
- Multicast QOS
- IGMP protocol statistics

QOS Guarantee

- Traffic control function
- Congestion avoidance function
- Queue scheduling function
- COS Priority function
- ACL function

Reliability Function

- 1+1 power modules
- BBU optional
- Fan speed automatically adjusts based on temperature
- Enables manual adjustment for primary and secondary power sources


Management Function

- CLI/WEB/Telnet/SSH
- Performance Management
- Alarm Management
- Security Management

Maintenance Function

- Device log
- Device upgrade
- Fault diagnose function
- Condition monitoring function

Product Interface

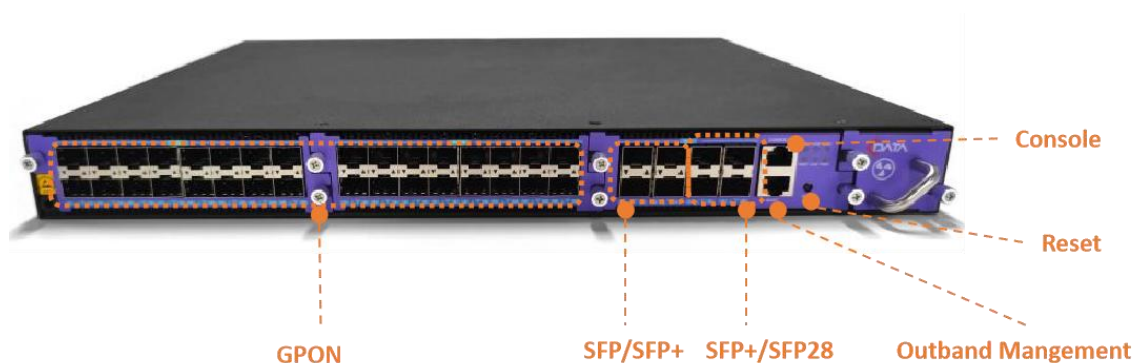

Product Specification

Mechanics

Management Rack	1U 19-inch standard box
Dimensions	440*375*44mm
Weight	About 6kg

Hardware

Uplink Port	4*1G(SFP)/10G SFP+ 4*10G(SFP+)/25G(SFP28)		
PON Port	Quantity	4*GPON/8*GPON/16*GPON/8*XG(S)PON	
	Physical interface	SFP slot	
	Interface type	GPON: ITU-TG.984.2 Class B+/Class C+	
	Max splitting ratio	GPON: 1:128	
Management Port		1 100/1000BASE-Tx out-band Ethernet port 1 CONSOLE local management port	
PON Port attribute	Transmission distance	20KM	
	Port rate	GPON: Downstream: 2.5Gbps	Upstream: 1.25Gbps
	Wavelength	Forwarding: 1490nm	Receiving: 1310nm
	Interface type	SC/UPC	
	Fiber type	9/125μm SMF (Single Mode Fiber)	
	Light transmission power	Class B+: +1.5 ~ +5dBm	Class C+: +3 ~ +7dBm
	Receiving sensitivity	Class B+: -28dBm	Class C+: -30dBm
	Saturation power	Class B+: -8dBm	Class C+: -12dBm
Backplane Bandwidth		400G	

Power Supply

AC	90V ~ 240V
DC	-40 ~ - 57 V

Environment

Working temperature	-15 ~ 50℃
Storage temperature	-40 ~ 85℃
Ambient humidity	5 ~ 90% (Non-condensing)